


Difficulty Level: ★★☆☆

INSTALLATION MANUAL

For best results, we recommend to paint everything first before gluing and assembly.

Parts Included:	Qty
(1) Hoop Retainer	1
(2) Hoop Retainer	1
(3) Hoop Retainer	1
(4) Hoop Retainer	1
(5) Front Hoop Alum	1
(6) Hoop Mount	1
(7) Hoop Mount	1
(8) Rear Hoop Alum	1
(9) Center Hoop Alum	1
(10) Horizontal Tie Bar Alum for Series 109	2
(11) M2 x 4 RS Screw	8
(12) M2 x 6 RS Screw	10
(13) Drain Channel Left Door Top Alum	1
(14) Drain Channel Right Door Post Alum	1
(15) Header Rail Alum	1
(16) Drain Channel Left Door Post Alum	1
(17) Drain Channel Right Door Top Alum	1
(18) M2 x 3 CSS Screw	4
(19) ST1.5 x 4 RS Screw	6
(20) ST2 x 5 RS Screw	2
(21) M2.5 x 3 Set Screw	2
(22) M2.5 x 6 RS Screw (23) Metal Rear Loop Tie Down	2
(24) Tie Down Cleat	5
(25) ST1 x 4 RS Screw	4
(26) Ø0.8mm Drill Bit	1
(27) Ø1.7mm Drill Bit	1
(28) Ø2.0mm Drill Bit	1
(29) Canvas Soft Top	1

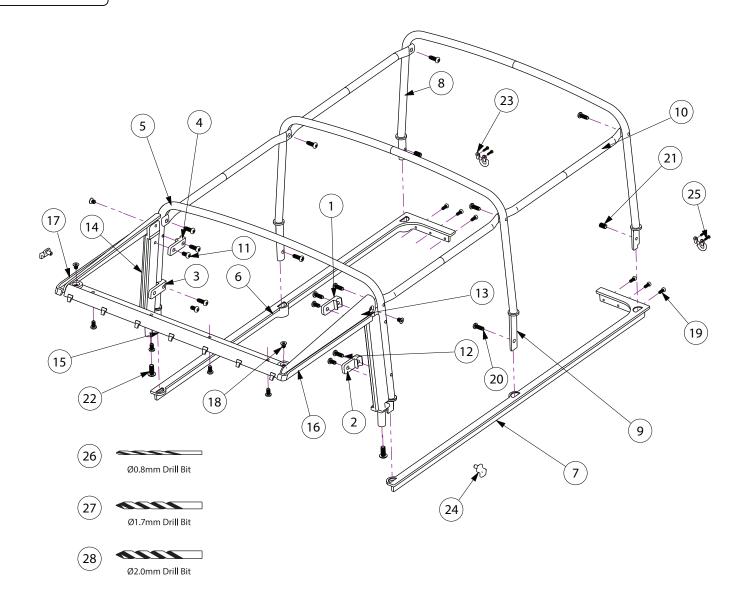






Scan or visit product page for canvas installation video

Note that before you install the cage, we recommend you scan the QR code to watch the video. There are some steps for the soft top that have to be done first before the cage is installed onto the body if you wish to have the soft top on.





Painting or dyeing the soft top fabric with certain materials may cause shrinkage.

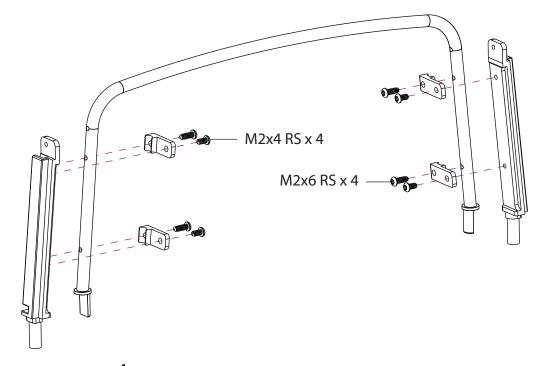


1.

Attach the two side door drain channels to the hoop with the four brackets using four M2x4 RS and four M2x6 RS screws.



Difficulty Level: ★★★☆☆

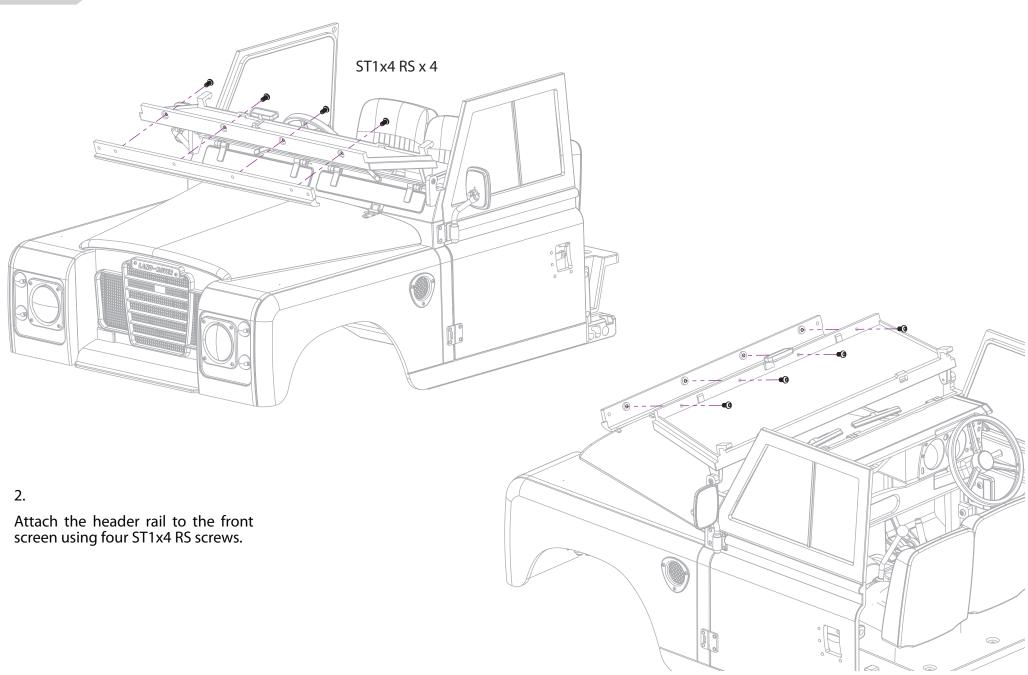




3.

Measure and align one tie down cleat on each side of the main rear bed as indicated.


Drill and glue onto each side.

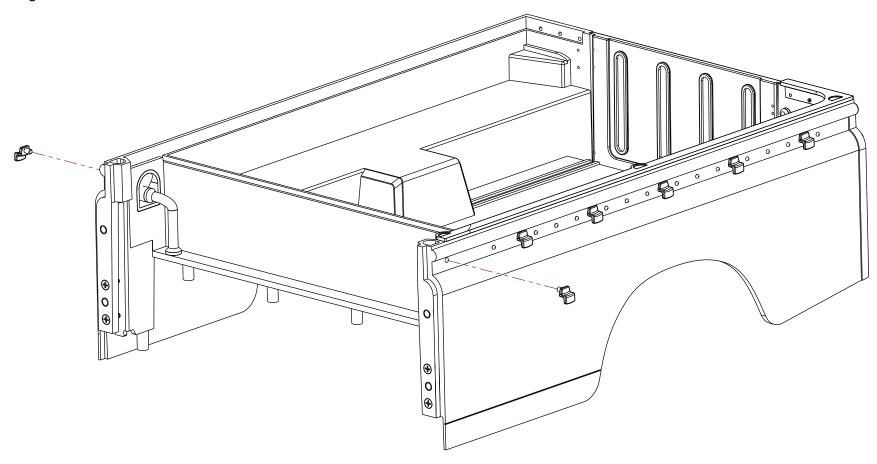




4.


Insert the hoop assembly through the hoop mounts to the body and install two ST2.5x6 RS screws from the bottom to secure it.

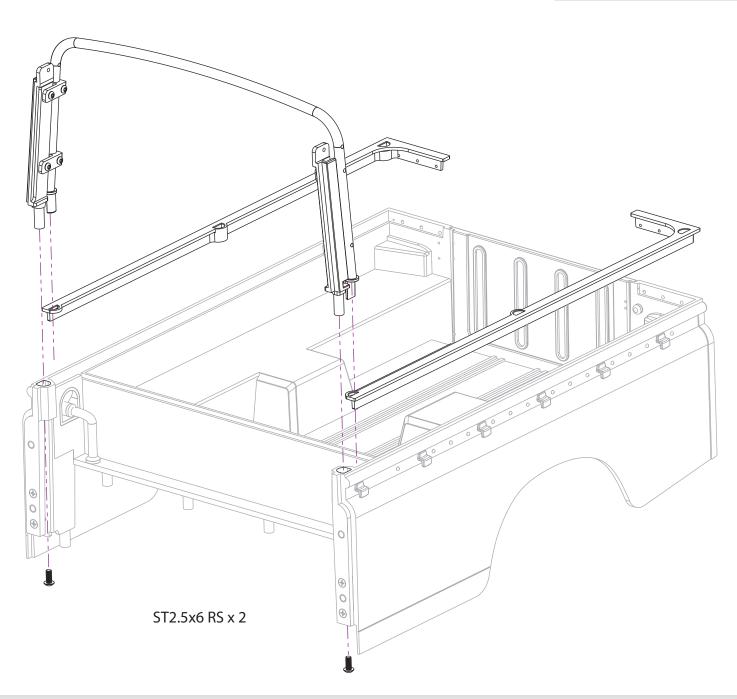




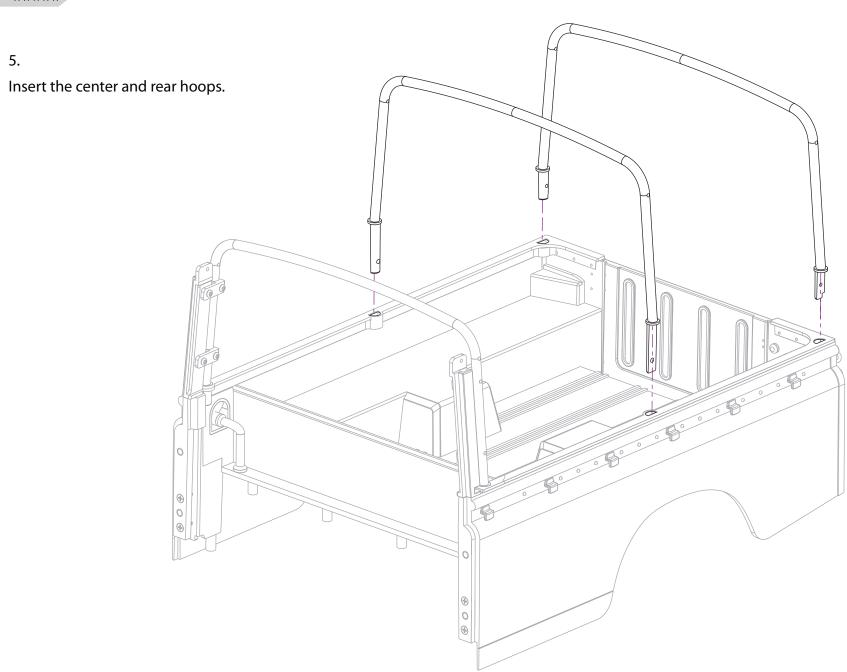




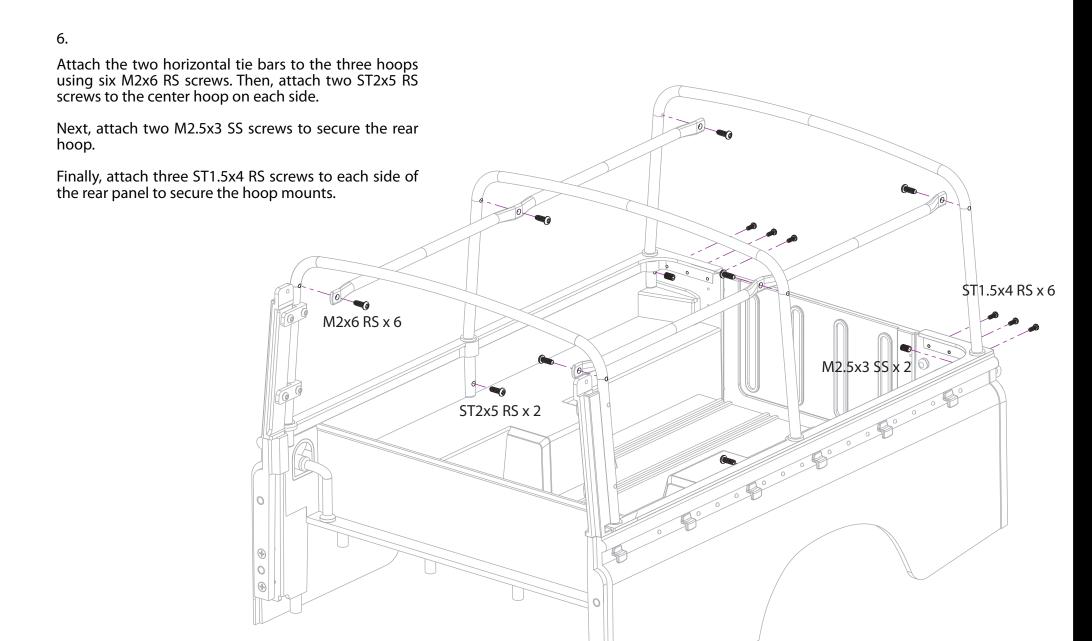



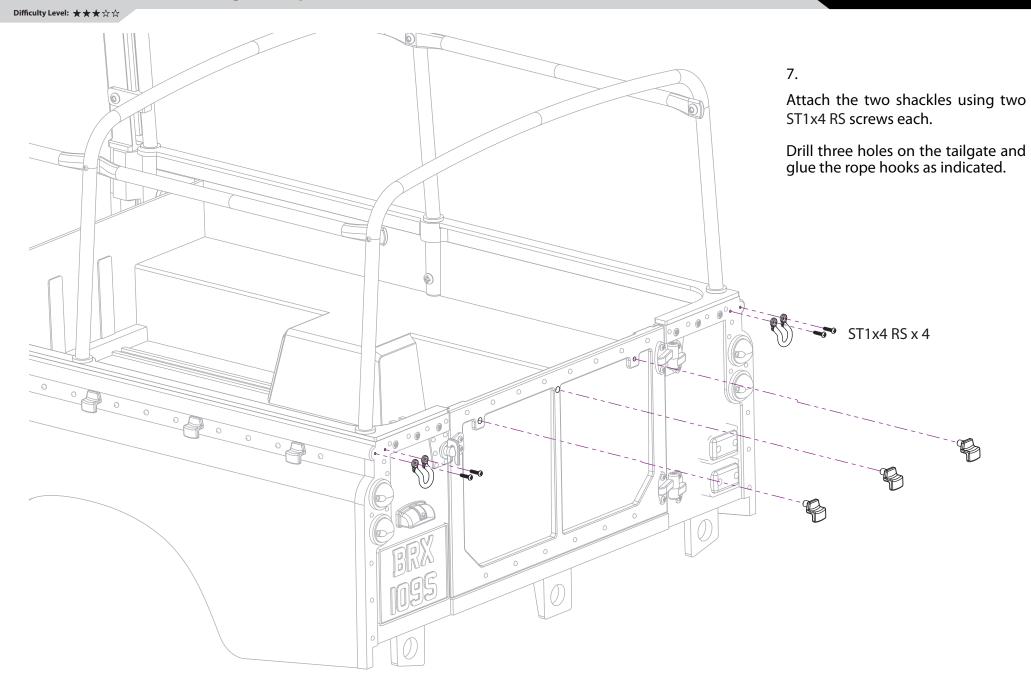



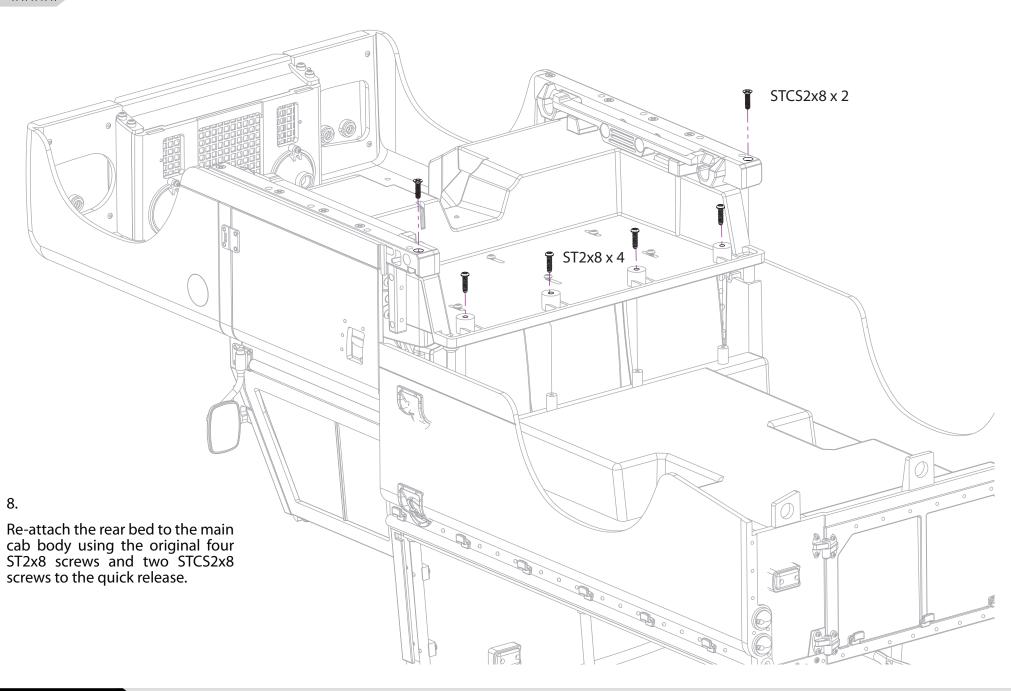



Difficulty Level: ★★☆☆

